

TORO

Count on it.

Reelmaster® 2000-D



TORO Count on it.

A reel mower for the masses.

Toro® Reelmaster® 2000-D


- 13,8 net kW (18.5 net hp) Briggs & Stratton® / Daihatsu® diesel engine
- Heavy-duty 69 cm (27") and 81 cm (32") cutting units
- 2- or 3-wheel drive
- Large flotation tires
- Onboard backlapping

Sports turf managers and golf course superintendents alike will appreciate the versatility and performance of the most affordable Toro reel mower. The classic triplex design of the Toro Reelmaster 2000-D delivers the beautiful field striping and aftercut appearance you've always wanted. And because it's a Toro, you can count on our world-renowned quality and construction.



Count on Performance

Turf managers worldwide depend on Toro for unsurpassed quality of cut. The Reelmaster 2000-D upholds this high standard with the legendary Toro cutting reels. Toro cutting units are constructed using only the most durable, high-performance materials and assembly techniques. And each component must meet a vigorous set of specification requirements before they leave the plant.

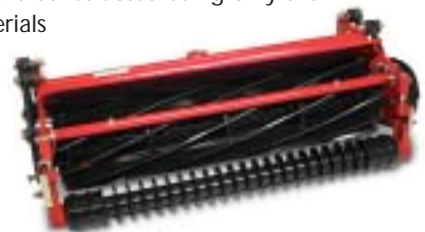



Right for the job.

We built the Toro Reelmaster 2000-D around a proven Briggs & Stratton/Daihatsu liquid-cooled diesel engine. With 13,8 net kW (18.5 net hp), it has more than enough power to maintain a consistent performance on wet or hilly terrain. We offer 69 cm (27") and 81 cm (32") cutting units for up 216 cm (85") of productivity. Streamlined controls allow even inexperienced workers to operate the Reelmaster 2000-D with precision. And your maintenance crew will thank you for onboard backlapping and single-point bedknife adjustment. Add it all up and the Toro Reelmaster 2000-D is an all-around performer that feels at home in almost any application.



Tackle tough terrain or challenging turf conditions with large flotation tires and 3WD.



5-, 8- or 11-blade 69 cm (27") only reels with adjustable, variable reel speed help you achieve the consistent cut you desire.

Attachments



69 cm (27") 11-blade cutting unit



Comb kit, scrapers, HD bedknife



Grass basket

Specifications for Reelmaster® 2000-D, Model 03428

Engine

Model: Briggs & Stratton®/Daihatsu®
Rating: 17.2 kW (23 hp) gross,
13.8 kW (18.5 hp) @ 2950 rpm net
Displacement: 850 cc (51.9 cu. in.)
Fuel: Diesel
Cooling: Liquid

Traction Unit

Frame: Formed steel, welded steel and steel tubing
Drive: 2WD & 3WD, hydrostatic, closed-loop
Wheel Motors: 197 cc (12 cu. in.), high-torque hydraulic
Hydraulic Oil Capacity: 8.7 liters (2.3 gallons)
Fuel Capacity: 25 liters (6.5 gallons)
Brakes: Hydrostatic service brake, hand parking brake

Tires

Front Traction Drive: 20 x 10-8, 4-ply
Rear Steering: 20 x 8-8, 4-ply

Ground Speed

Mowing: 0-8 km/h (0-5 mph)
Transport: 0-13 km/h (0-8 mph)
Reverse: 0-4.8 km/h (0-3 mph)

Controls

Steering: Pinion and sector gear
Forward/Reverse: Single foot traction, adjustable stop
Throttle: Hand, starter switch
Reel: Engagement switch, lift lever
Parking Brake: Ratchet hand lever
Seat: Adjustable

Electrical

Battery: 12 volt, 585 cold cranking amps at -18° C (0° F)
Alternator: 40 amps alternator with regulator/rectifier
Switches: Seat, PTO, parking brake, and traction interlock

Dimensions

Wheel tread width: 138 cm (54.5")
Wheelbase: 140 cm (55")
Overall Length (includes out front hoses): 244 cm (96")
Overall Width:
69 cm (27") cutting units: 194 cm (76.5")
81 cm (32") cutting units: 227 cm (89.5")
Transport Width:
69 cm (27") cutting units: 183 cm (72")
81 cm (32") cutting units: 216 cm (85")
Overall Height (top of steering wheel): 112 cm (44")

Cutting Units

Type: Three 18 cm (7") diameter reels, interchangeable
Options:

5, 8, and 11-blade reels for 69 cm (27") cutting unit
5 and 8-blade reels available for 81 cm (32") cutting unit

Height-of-Cut:

Floating: 6 - 44 mm (1/4 - 1 3/4")
Fixed: 13 - 67 mm (1/2 - 2 5/8")

Width-of-Cut: 183 cm (72"), or 216 cm (85")

Clip Frequency: Manually controlled, variable reel speed

Backlapping: On-board, standard

Bedknife-to-Reel Adjustment: Single point adjustment (SPA)

Rear Rollers: Full, standard

Front Rollers: Wiehle®, standard; full, sectional, or anti-scalp, optional

Certification: ANSI B71.4-1999, CE with required ballast installed

Warranty: Two-year limited



Count on it.

Products depicted are for illustration purposes only. Actual product offered for sale may vary in design, required attachments, and safety features. Not all products are sold in all countries.

Worldwide Headquarters

The Toro Company
8111 Lyndale Ave. So.
Bloomington, MN 55420 U.S.A.
Phone: (1) 952 888 8801
Fax: (1) 952 887 8258
www.toro.com

GB Printed in U.S.A.

©2004 The TORO COMPANY - All Rights Reserved.

Form #200-2352